




# Sets of 6 Legs for DF version display

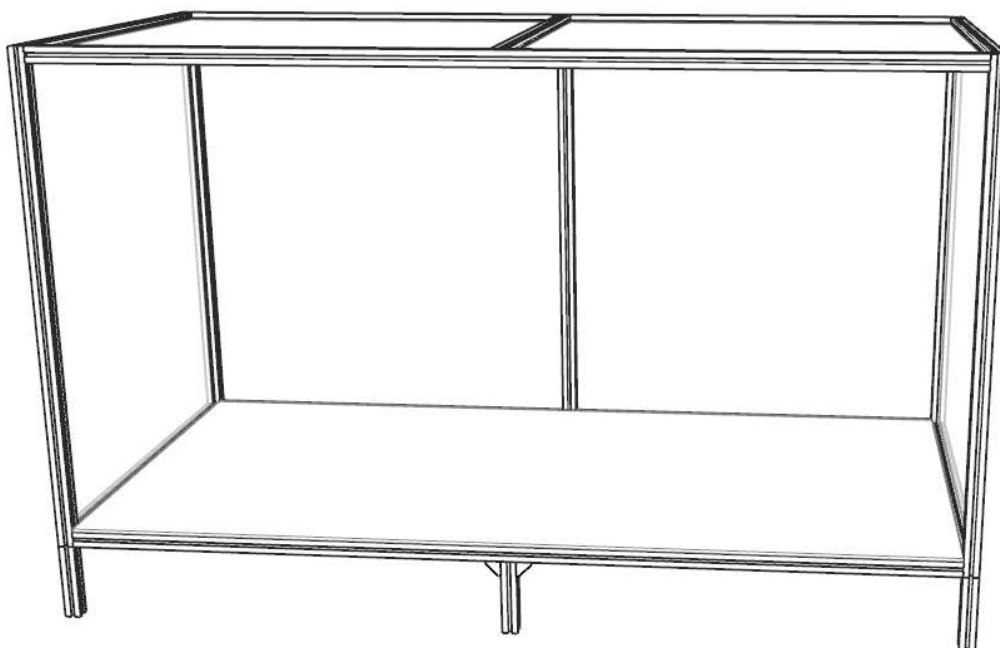

1. Remove front cover. Invert unit, resting on the top frame.

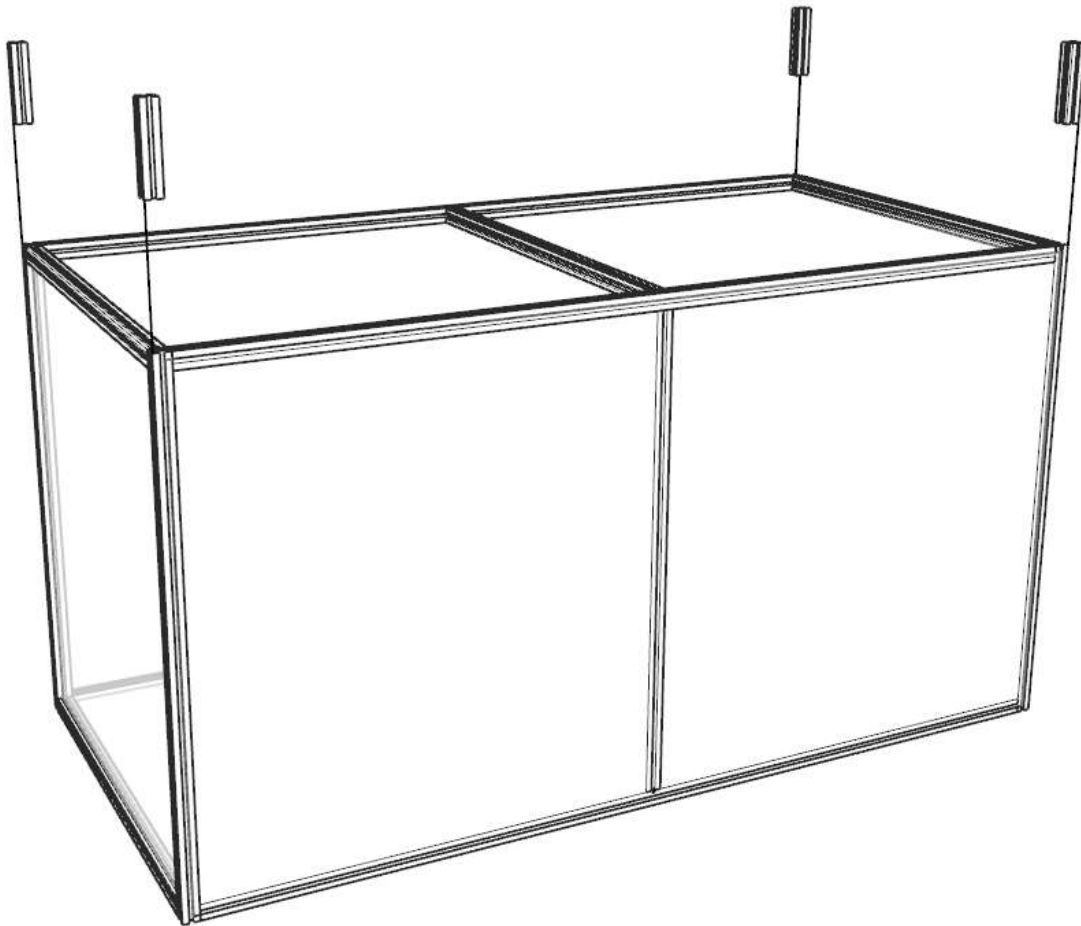

2. Start off by installing the 4 corners legs  
Using an allen key to loosen the bolt
3. Slide the vertical stack bar. One bolt on the leg and the other on the display frame. Tighten the bolts.

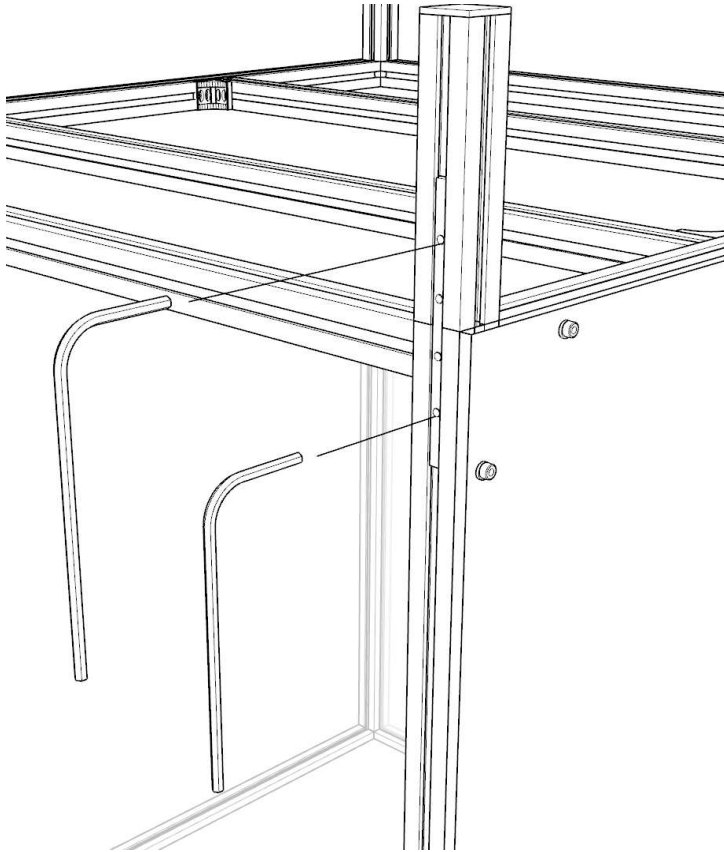

4. Repeat step 3 for the 3 legs.

5. Insert and align sliding nut on front and back bottom frame to position with the angle brackets. Use the screw provided to tighten it.
6. Repeat for all 4 angle brackets

