



DF30 Assembly Guide

Version 3.0




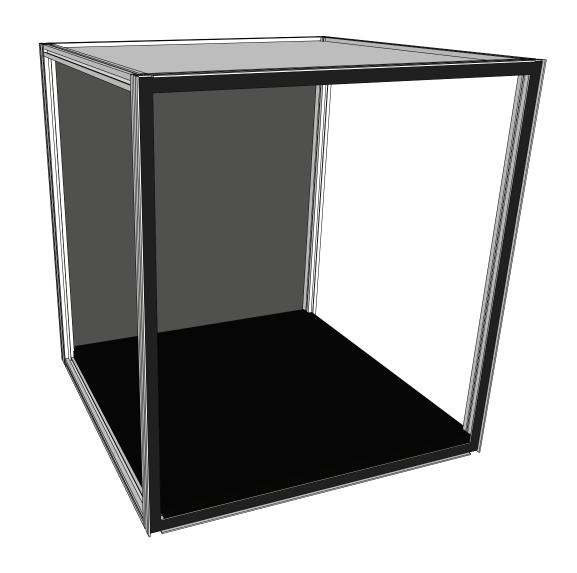

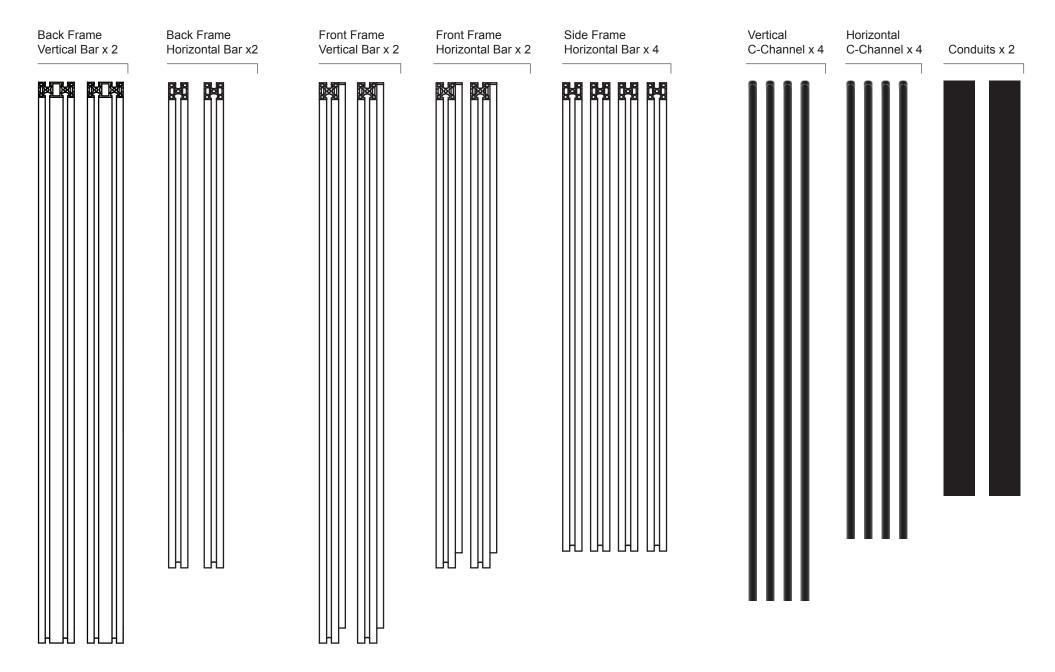





M5-Long Screw x 16

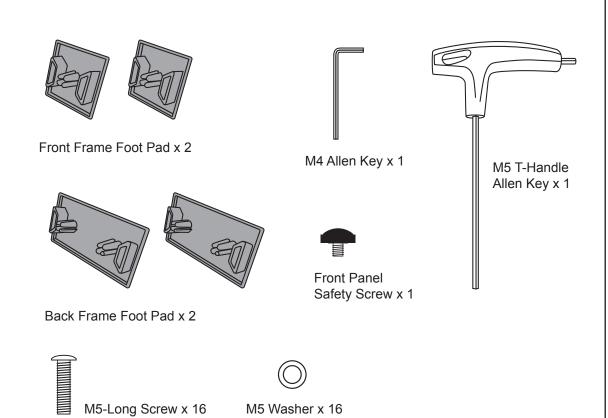

M5 Washer x 16

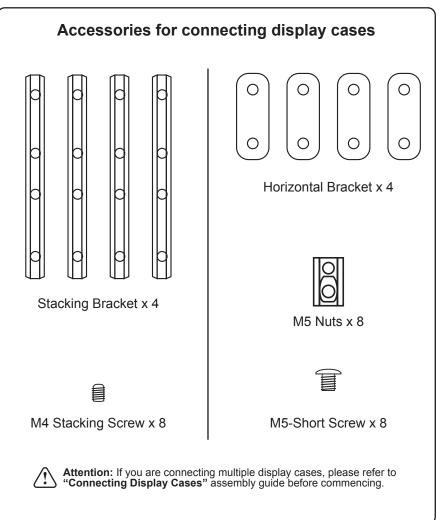




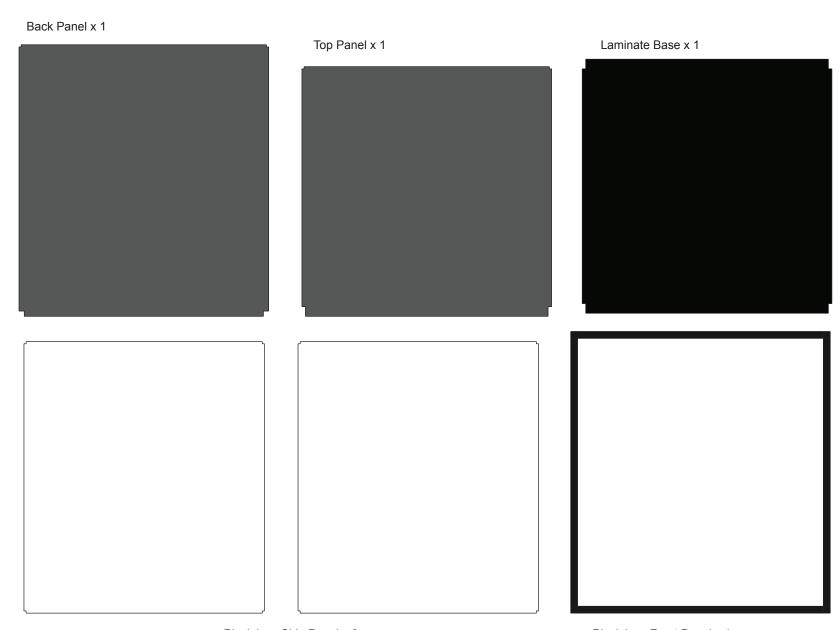

Plexiglass Side Panel x 2

Plexiglass Front Panel x 1



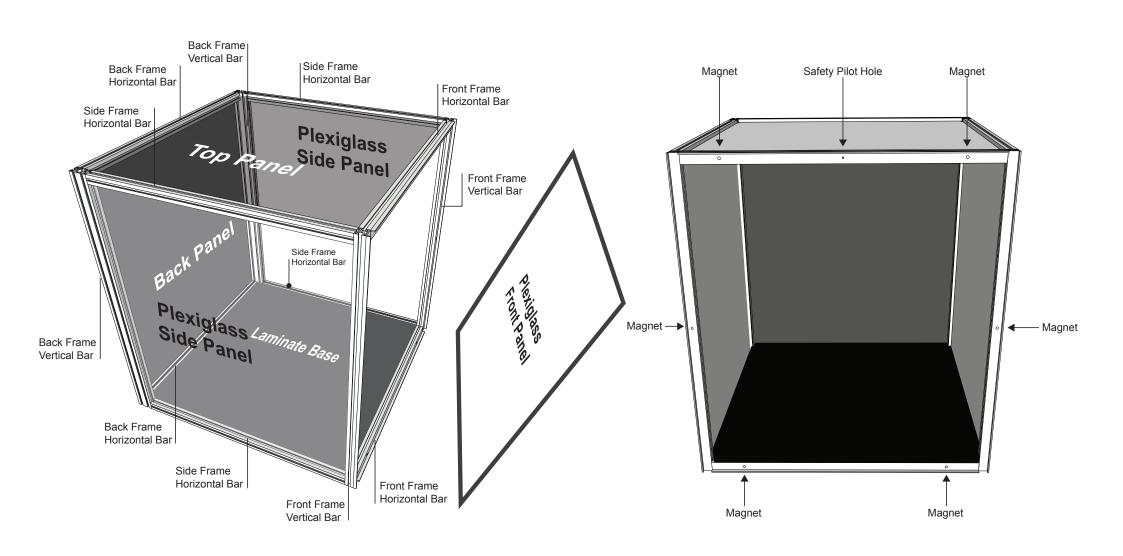

Attention: If you have a floor that could easily scratched or damaged, please ensure you cover the surface with a protective cover.



Attention: Please ensure you have all the parts before commencing assembly. Please read all of the instructions before commencing.



Attention: If you have purchased optional accessories, please refer to the **Optional Accessories** assembly instructions which are supplied separately.




You will need

- · Side Frame Horizontal Bar x 4
- Back Frame Vertical Bar x 2
- Front Frame Vertical Bar x 2
- · Horizontal C-Channel x 4
- Vertical C-Channel x 4

Steps to install C-Channel

- **Step 1.** Flatten one end of the C-Channel by pressing the open edges together.
- **Step 2.** Push the compressed tip into the slit of the bar.

Step 3. Press down the rest of the C-Channel along the slit of the bar.



C-Channel

Side Frame Horizontal Bar


Position the bar on any side. Install a Horizontal C-Channel into the top slit of the bar. Repeat for all bars.

Back Frame Vertical Bar

Position the bar with the pilot holes facing the flat surface. Install a Vertical C-Channel into the top slit of the bar. Repeat for all bars.



If you are joining the display cases horizontally, do not insert the C-Channel on the connecting bar.




Front Frame Vertical Bar

Place a bar with the magnets facing down. Install a Vertical C-Channel into the top slit. Repeat for all bars.



If you are joining the display cases horizontally, do not insert the C-Channel on the connecting bar.



You will need

- M5-Long Screw x 16
- M5-Washer x 16
- · Side Frame Horizontal Bar x 4
- Back Frame Horizontal Bar x 2
- Front Frame Horizontal Bar x 2

Steps to insert M5-Long Screw

- **Step 1.** Insert the M5-Long Screw fully into the M5-Washer.
- Step 2. Position the screw with washer into the pilot hole on the left side of the bar. Turn clockwise to tighten the screw. Leave a 15mm gap between the washer and bar.
- **Step 3.** Repeat steps 1-2 for the other side of the bar.
- Step 4. Repeat steps 1-3 for
 - Side Frame Horizontal Bar x 4
 - Front Frame Horizontal Bar x 2
 - Back Frame Horizontal Bar x 2

