



MAX150 Plus Assembly Guide

Version 3.0




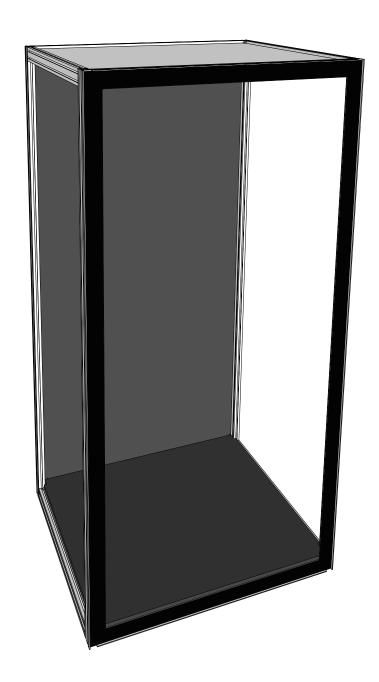

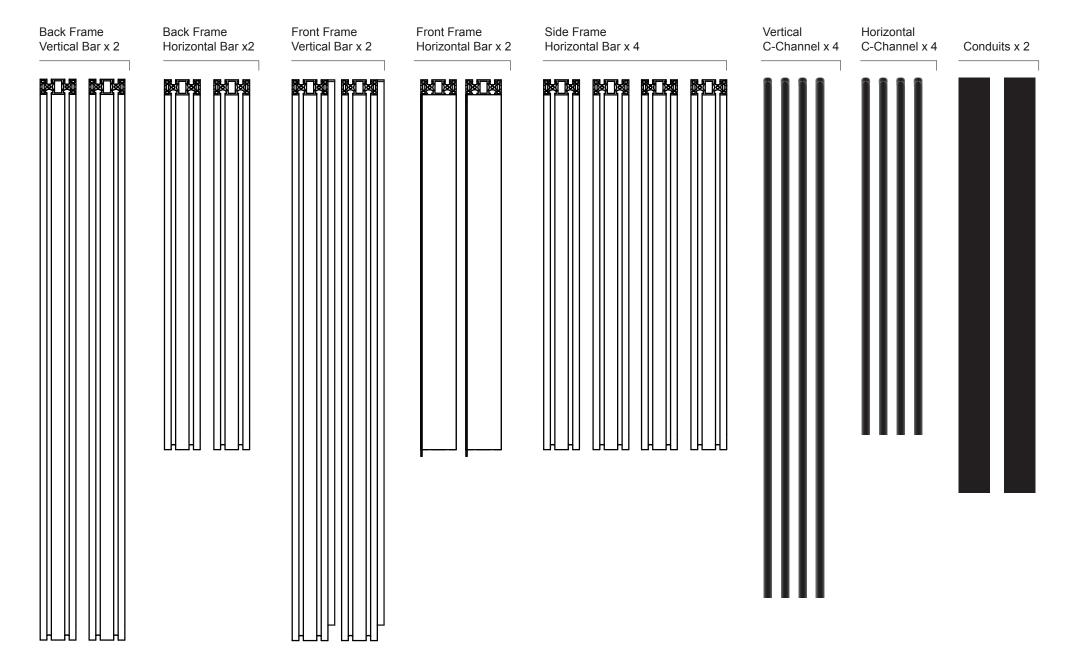





M5-Long Screw x 16

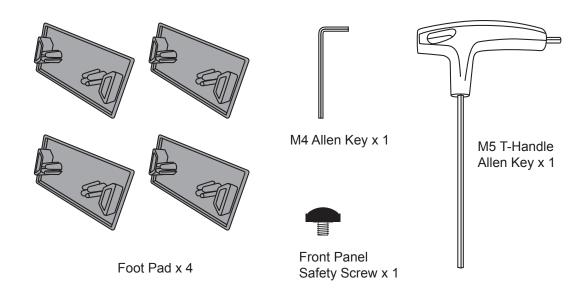


M5 Washer x 16

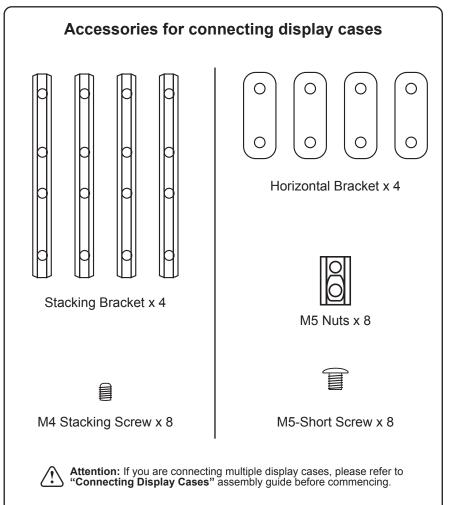



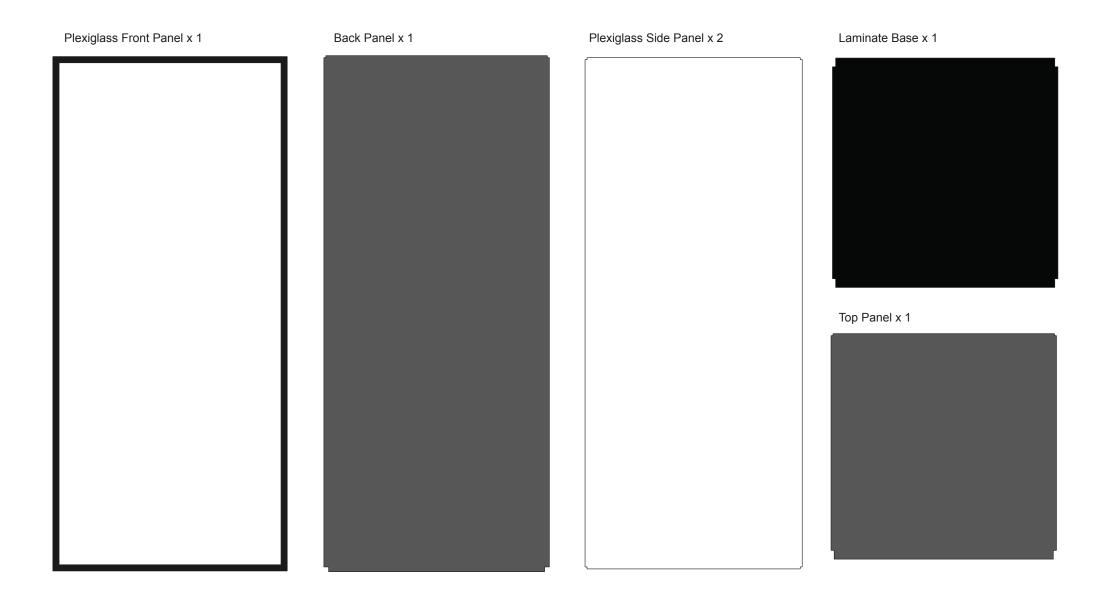



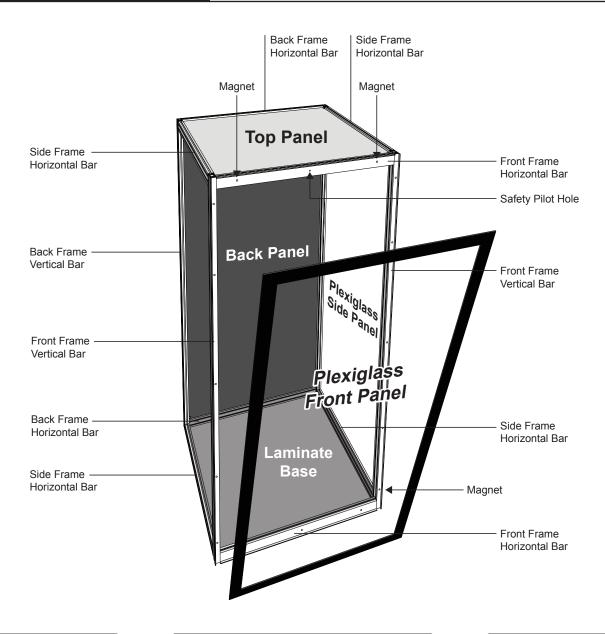



Attention: If you have a floor that could easily scratched or damaged, please ensure you cover the surface with a protective cover.



Attention: Please ensure you have all the parts before commencing assembly. Please read all of the instructions before commencing.



Attention: If you have purchased optional accessories, please refer to the **Optional Accessories** assembly instructions which are supplied separately.




You will need

- · Side Frame Horizontal Bar x 4
- Back Frame Vertical Bar x 2
- Front Frame Vertical Bar x 2
- · Horizontal C-Channel x 4
- Vertical C-Channel x 4

Steps to install C-Channel

- **Step 1.** Flatten one end of the C-Channel by pressing the open edges together.
- **Step 2.** Push the compressed tip into the slit of the bar.


Step 3. Press down the rest of the C-Channel.



C-Channel

Side Frame Horizontal Bar

Position the bar on any side. Install a Horizontal C-Channel into the top slit of the bar. Repeat for all bars.




Back Frame Vertical Bar

Position the bar with the pilot holes facing the flat surface. Install a Vertical C-Channel into the top slit of the bar. Repeat for all bars.



If you are joining the display cases horizontally, do not insert the C-Channel on the connecting bar.




Front Frame Vertical Bar

Place a bar with the magnets facing down. Install a Vertical C-Channel into the top slit. Repeat for all bars.



If you are joining the display cases horizontally, do not insert the C-Channel on the connecting bar.

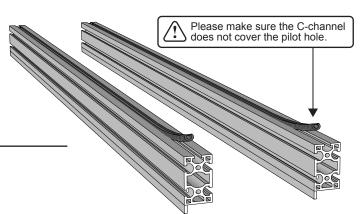


You will need


- M5-Long Screw x 32
- M5-Washer x 32
- · Side Frame Horizontal Bar x 4
- · Back Frame Horizontal Bar x 2
- Front Frame Horizontal Bar x 2


Steps to insert M5-Long Screw

- **Step 1.** Insert the M5-Long Screw fully into the M5-Washer.
- **Step 2.** Position 2 screws with washer into the pilot holes on the left side of the bar. Turn clockwise to tighten the screw. Leave a 15mm gap between the washer and bar.
- **Step 3.** Repeat steps 1-2 for the other side of the bar.
- Step 4. Repeat steps 1-3 for
 - Side Frame Horizontal Bar x 4
 - Front Frame Horizontal Bar x 2
 - Back Frame Horizontal Bar x 2






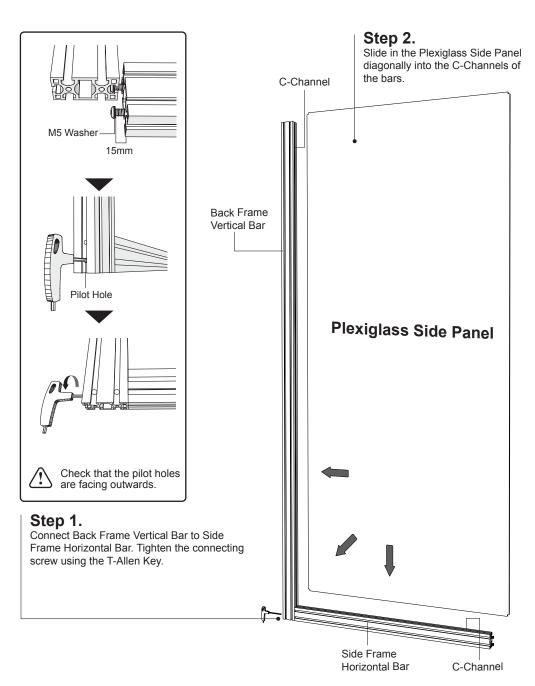


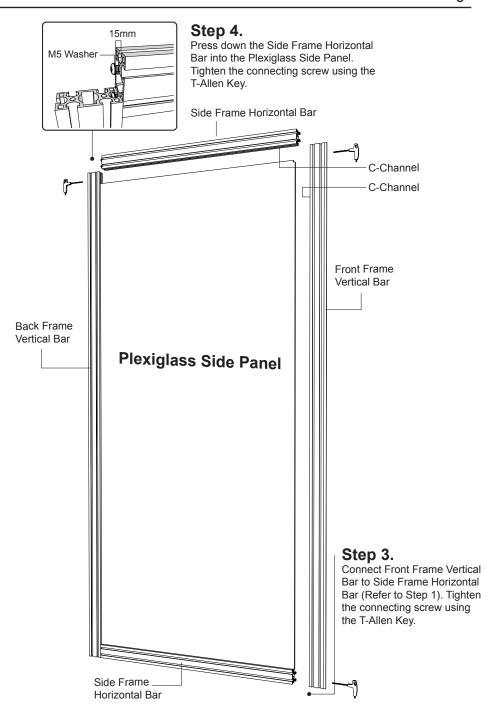



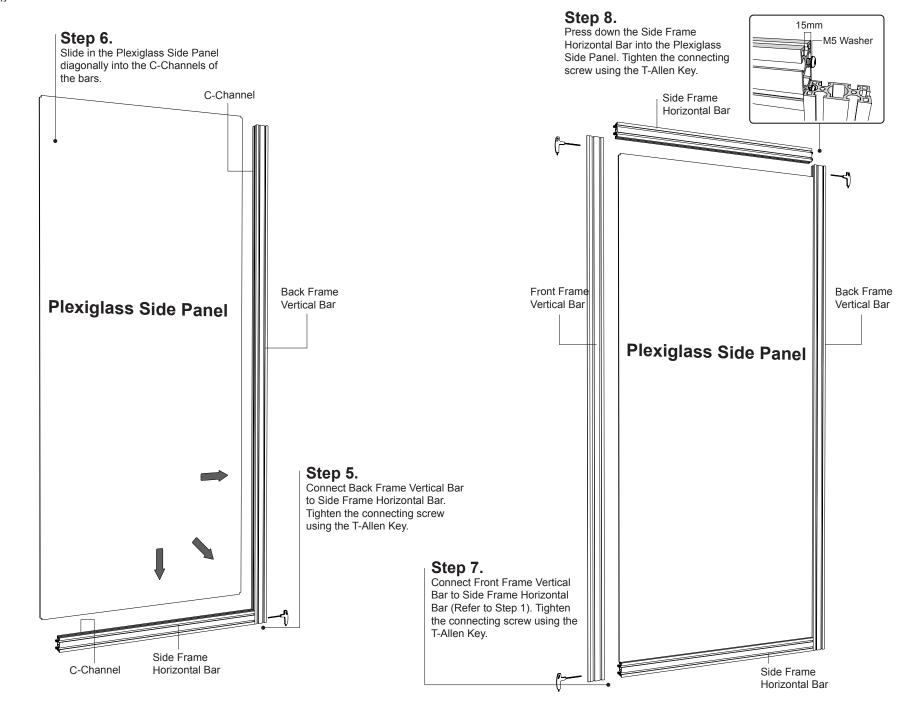



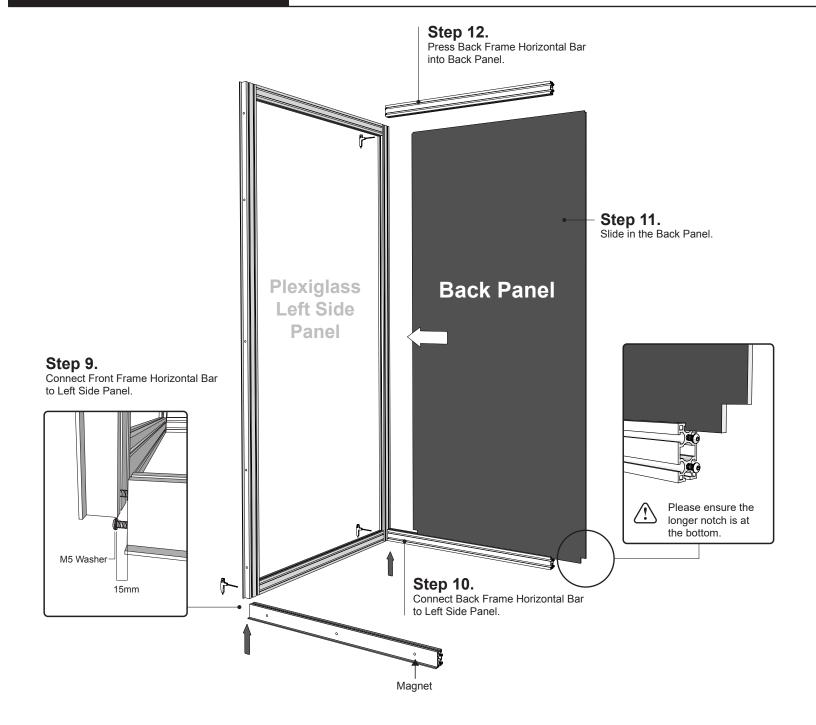

Magnet



